G 1206




The four-axle diesel-hydraulic G 1206 is designed for line service and heavy-duty shunting operations. It can be used flexibly in Germany, France and the Netherlands.

The powerful four-axle **G 1206** diesel locomotive is robust and reliable and is suitable for a wide range of applications – from heavy-duty shunting and regional services to medium-duty interregional line service.

Different country configurations allow the locomotive to be adapted to different areas of operation. Its high performance, modern equipment, ease of operation and radio remote control make the G 1206 particularly popular.

Manufacturer	Vossloh Rolling Stock
Locomotive type	CAT 3512 B DITA-SC
Traction power at wheel	1,500 kW
Starting tractive effort	282 kN
Operating speed	100 km/h
Tare weight	84 – 88 t
Length over buffers	14,700 mm
Minimum curve radius	60 m
Fuel tank net capacity	3,500 l
Radio remote control	Theimeg EC/LO
Train Control System	Depending on country-specific configuration
Miscellaneous	EBuLa, air conditioning, multiple traction, MESA 23, RK 900 shunting coupler, automatic start-stop system, Webasto pre-heating system
Homologation	DE, FR, NL

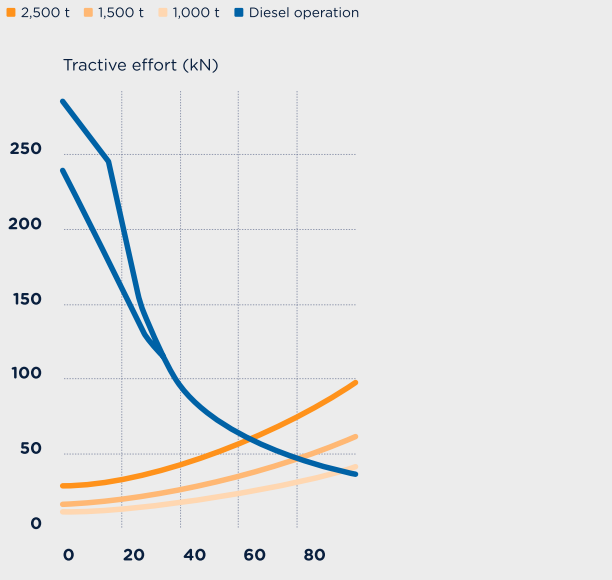

Source: Vossloh Rolling Stock

NORTHRAIL

Brandstwiete 1
20457 Hamburg
Germany

info@northrail.com
northrail.com

November 2026